

LOCK for Mechanical WINDOW

Technical File
T 14507 F

VER1000

Description - General Information

Lock designed to keep a smoke and heat exhaust window (S.H.E.V.) closed. Manual or distance control possible.





It can be installed in tandem on all windows with a width of more than 1200 mm.

Triggering is carried out either,

- mechanically, by traction of a steel cable,
- or - manually.



VER1000

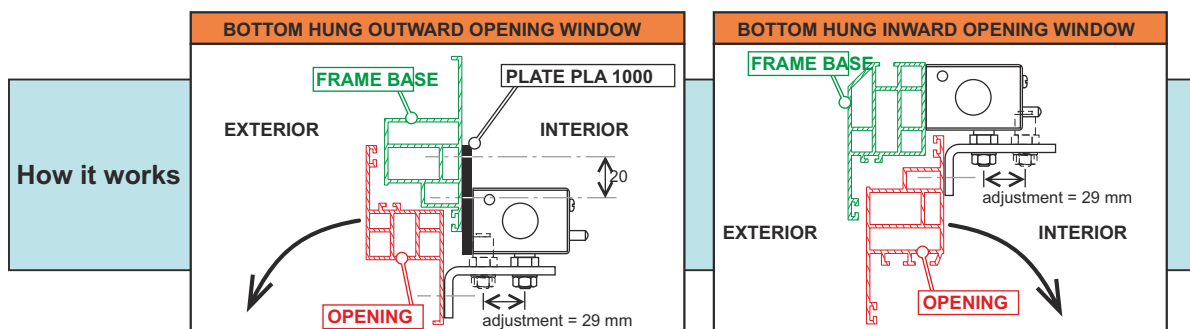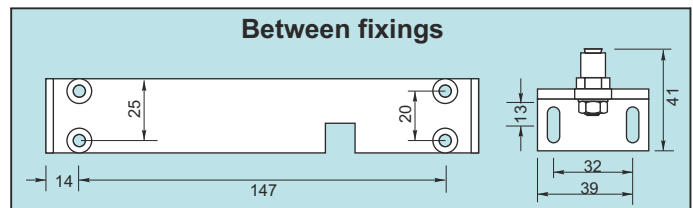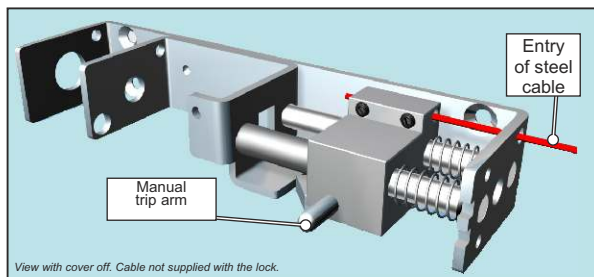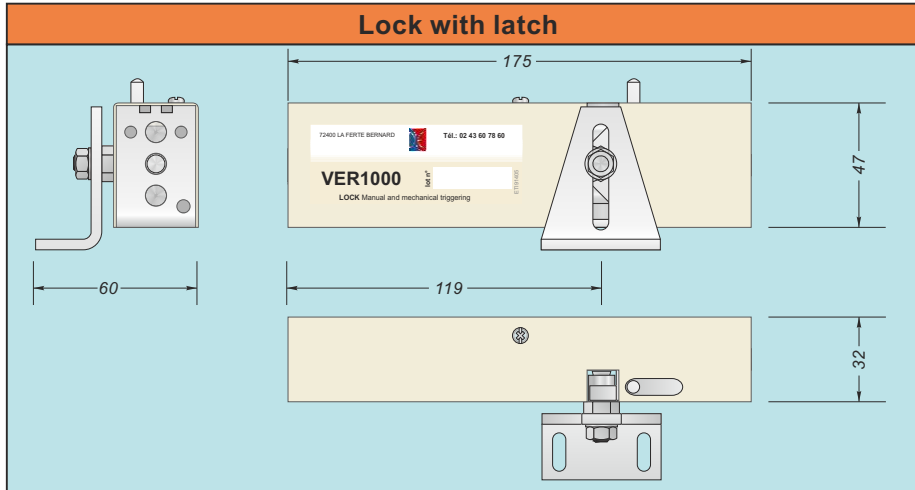

Technical Characteristics

- Material : Steel, aluminium.
- Protection : White zinc coating, RAL 1013 (cover).
- Energy : Manual
- Distance control input : By steel cable Ø 3 mm maximum.
- Cable lock : 2 clamping points with setscrews HC M4.
- Pulling direction : To the right : for bottom hung window, to the left : for top hung window.
- Precautions : Stock and install away from bad weather conditions.

DUPUY EQUIPEMENTS

Les Ajeux - 72400 La Ferté Bernard - France
Tel. : +33 (0)2 43 60 78 60 - Fax : +33 (0)2 43 93 41 94
e-mail : clients@de72.fr



www.dupuy-equipements.com

LOCK for Mechanical WINDOW

VER1000

Example of installation

